




High Performance Floor  
Coatings and  
Re-Surfacing Screens

EPOXY WATERPROOFING

# DRYFIX EPOXY BUND PAINT

- **Flexible Chemical and Waterproof Paint**
- **Virtually Odourless - No Pitch, Tar or Solvents**
- **Internal and External Use**
- **Easy to Mix Twin Pack - 50/50 Mixing Ratio**

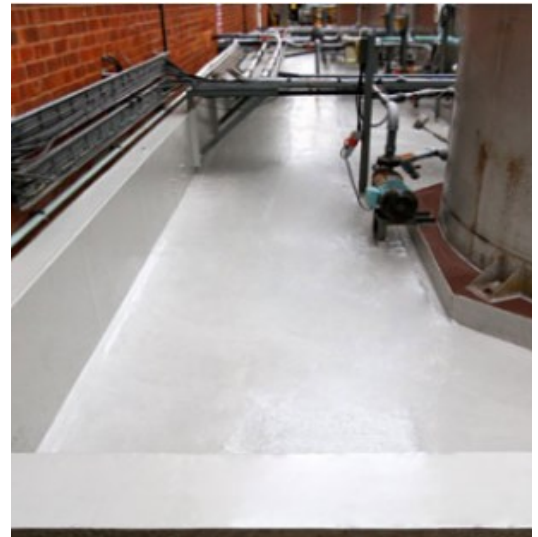

**BUND PAINT** is a twin pack epoxy resin coating. When fully cured, the material provides a flexible, abrasion, chemical resistant and waterproof coating of outstanding durability for both interior and exterior applications.

**USES:** For bund areas to retain spillages from oil, petrol, diesel and a wide range of chemicals. For the complete waterproofing of gutters and as a protective coating for steel.

**PREPARATION:** Surfaces must be clean, sound and free from surface contamination. Surfaces can be damp, although for more permanent installations we recommend that the surface is as dry as possible. Large cracks must be repaired prior to applying Bund Paint. Excellent repairs can be carried out using Patching Mortar. Joints or cracks can be bridged by Bund Paint using a 75mm wide Fibreglass Reinforcing Tape. Bund Paint can be applied onto painted surfaces but all loose paint must be removed. Remove all loose metal rust by wire brushing. Severe heavily corroded metal should be treated with a suitable rust converter prior to painting with Bund Paint.

**MIXING:** Empty the entire contents of Pack B (Hardener) into Pack A (Resin) and stir thoroughly using an electric drill and mixing paddle on a slow speed. Once mixed use all within 45 minutes at 20°C. The higher the ambient room temperature the shorter the useable life.

Alliance Remedial Supplies Limited

Unit 11-12 Regent Trade Park, Gosport, Hampshire, PO13 0EQ

Tel: 01329 235252, Email: [sales@arsstore.co.uk](mailto:sales@arsstore.co.uk), Web: [allianceremedialsupplies.co.uk](http://allianceremedialsupplies.co.uk)

VAT: 119 914 303, Co Reg: 07814823





High Performance Floor  
Coatings and  
Re-Surfacing Screens

# EPOXY WATERPROOFING



**APPLICATION:** Apply by brush, working well into the substrate. Apply evenly and as generously as required to provide a continuous film of resin. One coat is normally adequate to produce a watertight seal but a second coat maybe necessary particularly on porous or open block work or heavily textured or porous substrates.

**FIBREGLASS REINFORCING TAPE:** Prepare the surface as required. Mix and apply the Bund Paint 100mm either side of the joints and cracks. While the surface remains wet and tacky, place the Fibreglass Reinforcing Tape onto the Bund Paint and press to ensure the tape is well embedded. Tape can be pushed onto wet Bund Paint and placed along right angles and corners of the structure.

Alternatively, all joints, cracks, corners and angles can be treated first with the Fibreglass Reinforcing Tape and Bund Paint and allowed to harden. A full top coat of Bund Paint can then applied over the entire area as one continuous coating.

**HEALTH AND SAFETY:** Read the Health and Safety Data Sheet prior to handling this product.

**APPEARANCE:** Thick viscous liquid available in grey, red and black.

**COVERAGE:** Approximately 3m<sup>2</sup> per litre depending upon the site conditions that prevail, i.e., surface texture, porosity and temperature of the substrate.

**POT LIFE:** When fully mixed 35 minutes @ 20°C. Extended pot life at lower temperatures, reduced pot life at high temperatures.

**SHELF LIFE:** 24 Months in sealed containers if stored under normal conditions.

**HARDENING/CURE TIME:** Tack free in 24 hours @ 20°C. 48 hours @ 15°C. Full cure in 7 days. Can be applied at any temperature and as low as 0°C. Slower curing for extremely cold conditions and an increase in thickness of product.

**CHEMICAL RESISTANCE:** Resistant to a wide range of acids, alkalis, solvents and chemicals found within industry.

*Whilst Alliance Remedial Supplies Limited endeavours to ensure that any advice, recommendation, specification or information it may give is accurate and correct, it can not, because it has no direct or continuous control over where or how its products are applied, accept any liability either directly or indirectly arising from the use of its products, whether or not in accordance with any advice, specification or information given.*

Alliance Remedial Supplies Limited

Unit 11-12 Regent Trade Park, Gosport, Hampshire, PO13 0EQ

Tel: 01329 235252, Email: [sales@arsstore.co.uk](mailto:sales@arsstore.co.uk), Web: [allianceremedialsupplies.co.uk](http://allianceremedialsupplies.co.uk)

VAT: 119 914 303, Co Reg: 07814823