




High Performance Floor
Coatings and
Re-Surfacing Screens

EPOXY SAFETY TREAD

DRYFIX EPOXY SAFETY TREAD

- **Long Lasting Performance**
- **Excellent Slip Resistance**
- **Rapid Hardening — Early Return to Use**
- **Simple to Mix and Apply**

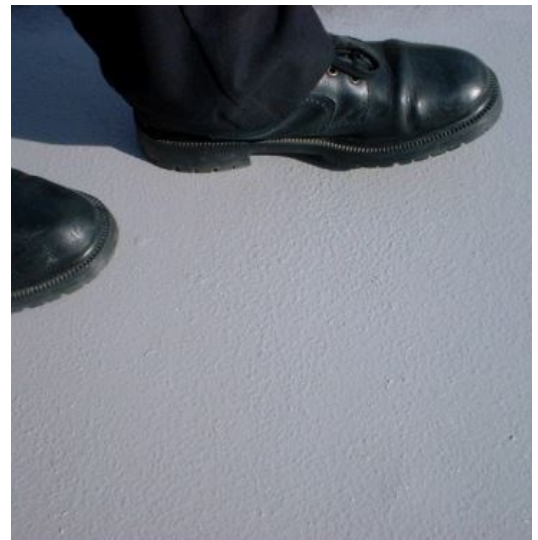

EPOXY SAFETY TREAD is a three-part, epoxy resin based topping designed to provide a tough, durable and slip resistant floor surface for external timber decking, concrete and metal surfaces. It has excellent chemical resistance.

USES: Safety Tread is ideally suitable for timber decking, foot bridges, wheel chair access ramps, steps, patios, conservatories, walkways and swimming pool surrounds. All external floor areas that demand excessively high slip resistance.

PREPARATION: Surfaces must be clean, dry, sound and free from grease, oil and other forms of contamination. Clean weathered/worn timber decking thoroughly. Wash oil contaminated concrete thoroughly with concrete cleaner and rinse well with cold clean water. Safety Tread can be applied onto previously painted surfaces providing the existing paint is sound and well abraded. Fill all holes and face up all cracks etc with epoxy filler. Secure paper masking tape to designate walkways, gangways and apply between the taped lines. Remove the tape while the safety tread is still wet. Prepare metal surfaces thoroughly to remove all rust and immediately prime.

PRIMING: For decking no priming is normally required. For concrete prime with one coat of epoxy sealer the day before the application of the safety tread. Prime metal surfaces with two coats of Zinc Phosphate or any other rust inhibitor primer.

MIXING: Empty the entire contents of Pack B (Hardener) into Pack A (Resin) and stir thoroughly using pallet knife for 3 minutes. Ensure you reach the sides and bottom of the container during the mixing process. Having mixed thoroughly the entire contents must be used within 45 minutes.

Alliance Remedial Supplies Limited

Unit 11-12 Regent Trade Park, Gosport, Hampshire, PO13 0EQ

Tel: 01329 235252, Email: sales@arsstore.co.uk, Web: allianceremedialsupplies.co.uk

VAT: 119 914 303, Co Reg: 07814823





High Performance Floor
Coatings and
Re-Surfacing Screeds

EPOXY SAFETY TREAD



APPLICATION: Apply immediately after mixing by brush or small disposable roller in manageable strips. Allow to settle for a few minutes to level. While still wet fully cover the wet surface (but avoid dropping heavy deposits) with the colour pack by casting in an upward direction. Avoid forming a “dry edge” when sprinkling the colour pack.

HEALTH AND SAFETY: Prior to handling this product read the Health & Safety Data Sheet.

COVERAGE: 5m² or 10m² but depending upon the porosity and texture of the substrate.

POT LIFE: When fully mixed approximately 45 minutes. Extended pot life at lower temperatures

SHELF LIFE: 12 Months in sealed tins that are stored under normal conditions.

CURING /HARDENING TIME: Hard cure in 24 hours @ 20°C. Do not use at temperatures below 5°C. Full cure/hardening after 7 days.

CHEMICAL RESISTANCE: Resistant to spillages of most chemicals commonly met within industry. Contact our Technical Department for further information.

PROPERTIES			
STRENGTH	AFTER 24 HOURS	3 DAYS	7 DAYS
Tensile Strength	15 MPa	23Mpa	25MPa
Flexural Strength	10MPa	19MPa	21 MPa

SLIP RESISTANCE: The fully cured product offers excellent slip resistance. Certified when tested to BS 7976-2 Mean PTV (Dry) 64 (Low Risk of Slip) Mean PTV (Wet) 53 (Low Risk of Slip)

PACK: Supplied as a three pack system. Resin, Hardener and Colour Pack 5m² or 10m² kits.

COLOURS: A range of colours are available - see colour chart.

Whilst Alliance Remedial Supplies Limited endeavours to ensure that any advice, recommendation, specification or information it may give is accurate and correct, it can not, because it has no direct or continuous control over where or how its products are applied, accept any liability either directly or indirectly arising from the use of its products, whether or not in accordance with any advice, specification or information given.

Alliance Remedial Supplies Limited

Unit 11-12 Regent Trade Park, Gosport, Hampshire, PO13 0EQ

Tel: 01329 235252, Email: sales@arsstore.co.uk, Web: allianceremedialsupplies.co.uk

VAT: 119 914 303, Co Reg: 07814823