

ACR60 / ACR60LV

Continuous Running Ventilation Unit

Product Datasheet



- Trickle & boost speeds adjustable
- Day logger, hours on trickle and boost, hours boosted by humidity and energy consumption as standard
- Custom 3 digit settings lock
- Timer adjustable
- Humidity sensor
- 7 year warranty

Order Code


ACR60	Continuous running HTP fan with extract performance up to 60l/s
--------------	-----------------------------------------------------------------

ACR60LV	Low voltage continuous running HTP fan with extract performance up to 60l/s
----------------	-----------------------------------------------------------------------------

Benefits

The ACR60 & ACR60LV continuous running HTP fan has been designed for bathrooms and kitchens, with a selection of trickle from 6-13l/s. Comes with intermittent to continuous running options, a day logger, custom 3 digit settings lock, hours on trickle and boost, hours boosted by humidity and energy consumption as standard. The HTP fan has an adjustable automatic sensing humidity sensor, a timer adjustable between 1 and 30 minutes and, an in-built boost activated by pullcord, a sleek tile front for discreet installation and comes with a 7 year warranty.

Fan Dimensions (mm)

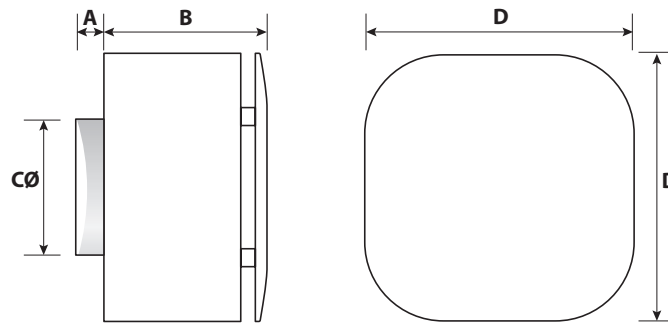

Casing (mm):

A	B	C	D
30	132	99	193

Hole diameters (mm):

Walls	Ceilings	Windows
107	107	117

Fan Technical Data

Fan motor	Extract capacity	Trickle dB(A) @ 3m
24VDC, 1.4W on trickle, 26W on max boost	216m ³ /h (60 ltrs/sec)	15

Humidity Sensor Technical Data

Humidity range	Humidity threshold adjustment range	Humidity threshold adjustment units	Default Humidity Threshold
30% RH - 90% RH	50% RH - 70% RH	5% RH	70% RH