


TECHNICAL SPECIFICATION/PRODUCT DATASHEET



PRODUCT CODE	CD 458 ENB
SUB-CATEGORY	Solid top
MATERIAL	Nylon composite (100 % Recyclable)
BASIC DIMENSIONS	Clear opening:450 DiameterOverall size:544 DiameterOverall Depth:122Frame Depth:51Depth of insertion:25
WEIGHT (Kgs)	9 Kgs
LOAD RATING CLASSIFICATION	B125
LOAD TEST DATA	Tested to BS EN 124-1:2015 Clauses 4.1,4.2,6.2,6.3,6.4, 6.5,6.6,6.7,6.10,6.13,6.15,6.16,7.1,7.2 and 7.3 BSI Direct test - Test report No. 3484675



CLARK-DRAIN

Tel: 01733 765317

QF TECH-00_C Rev 2 18/01/2022

Due to our continuous improvement program features and sizes may be subject to change without notice



TECHNICAL SPECIFICATION/PRODUCT DATASHEET

KEY FEATURES

B125 Loading capability, lighter than equivalent ductile product.

Perfect partner for CD U455 chamber riser.

Fits other manufacturer's 450 PPIC chamber (depending on exact size).

Aesthetically pleasing, will not rust/"bleed" onto the surround.


Unique slip-resistant surface tread pattern.

Dual locking (lid locks to frame + frame locks to chamber)

Compatible with reducer (available separately) to restrict access into deep chambers as per Part H of the building regulations.

Made from 100 % recycled material

Made in Britain

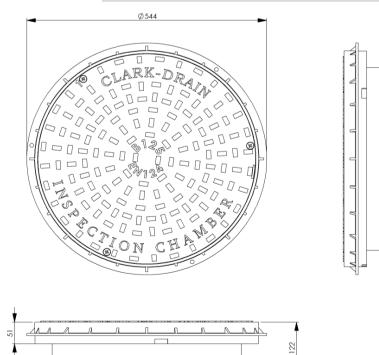



Tel: 01733 765317