



PIV ONE

ELTA >>>
TRADE

PIV ONE

Loft Mounted Positive Input Ventilation Unit

Loft mounted whole-house Positive Input Ventilation unit designed to introduce fresh, clean and filtered air into the dwelling. This dilutes, displaces and replaces internal stale, contaminated, humid air.

IMPROVES INDOOR AIR QUALITY

Better health and reduced heating costs.



Creates a healthier, more comfortable environment, curing condensation and mould problems, as well as reducing Radon gas concentration.



Two filters to ensure that incoming air is clean by removing dust, pollen and external air pollutants.



EC motor saves energy and provides extremely quiet operation.



Additional IAQ filter upgrade available to filter to PM2.5 (diesel particulates).

01384 275771
info@eltatrade.co.uk
www.eltatrade.co.uk

**WE COULDN'T FIT
EVERYTHING ON HERE,
SCAN THE QR CODE TO
FIND OUT MORE**



FEATURES & BENEFITS

- **Highly effective at reducing condensation** and improving indoor air quality.
- **Double filtration** as standard, ensuring that the incoming air is clean, removing dust, pollen and external air pollutants.
- **Washable pre-filter** features an integral magnet system so it can be removed and cleaned (without tools) easily. This pre-filter stops dust from being pulled into the primary filter, restricting filtration and reducing the filter's lifetime.
- **Internal ISO Coarse 60% (G4) filter** as standard removes dust, mould spores and general pollutants. For high-traffic areas, this can be upgraded to an IAQ filter to remove diesel fumes.
- **Discreet ceiling diffuser** with adjustable blanking plates to allow the airflow to reach where it is needed.
- **Pre-wired and pre-mounted fixing points** along with multiple modes of operation selectable at time of deployment mean a fast, versatile installation.
- **Acoustic foam lining** (self-extinguishing) for sound attenuation.
- **5 year warranty**, for full details, visit www.eltatrade.co.uk.

» **5
YEAR
WARRANTY**


PERFORMANCE DATA

PIV ONE	Min
Max Airflow L/s (m³/h) @ 100pa	216 (60)
Power W	24
Sound Pressure dB(A) @ 3m	27
Volts	220-240
Hertz	50/60
Max Ambient Temperature °C	40
Degree of Protection	IPX2


For full technical data, please refer to www.eltatrade.co.uk.




DIMENSIONS



FRONT VIEW

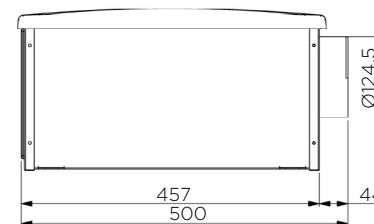

SIDE VIEW

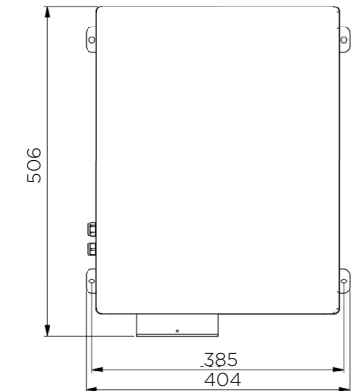

TOP VIEW

Dimensions in mm.