
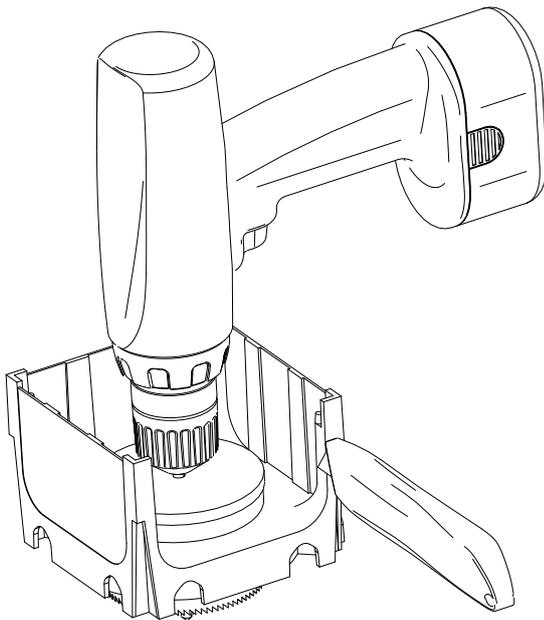
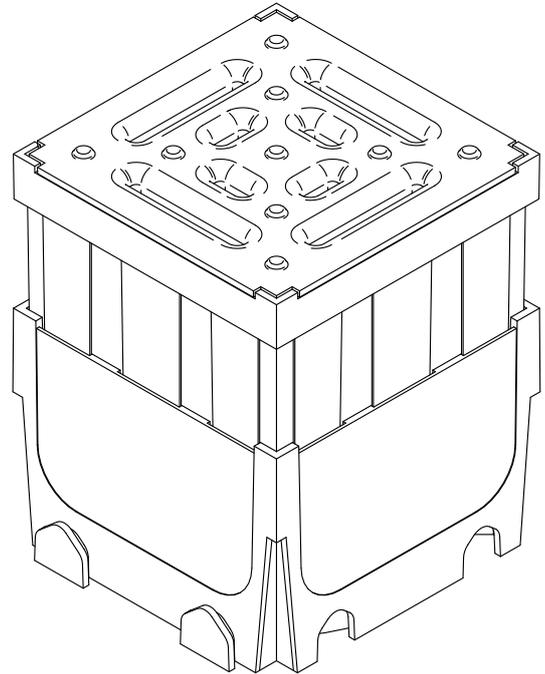

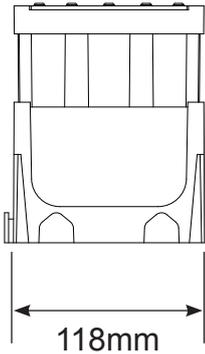


## SlotDrain Junction Unit

CODE GPDST-JU



### Description

The SlotDrain Junction Unit is made up of 3 components; a channel base, an extension piece and a grate lid. A SlotDrain Junction Unit should be placed at each end of a SlotDrain run and longer runs should include a Junction Unit at 3m intervals to allow access for rodding and cleaning. The SlotDrain Junction Unit can also be used for creating 90° corners, T-junctions and 4-way junctions. The relevant thinned out sides need to be removed before use which can easily be done with a utility knife. Fig. A shows how the base of the unit can be cut out using an 80mm dia. hole saw. There is a drill centre point located on the base to aid cutting, after which a leaf trap can be placed in the hole and using the circular ribs to locate a 4" underground drain pipe, the unit can be used as an outlet.

<b>Packaging</b>	6 per box
<b>Weight</b>	2.0kg per box
<b>Colour</b>	Black
<b>Material</b>	Polypropylene
<b>Manufacturing Process</b>	Injection moulded

MANTHORPE BUILDING PRODUCTS LTD  
 MANTHORPE HOUSE  
 BRITAIN DRIVE  
 CODNOR GATE BUSINESS PARK  
 RIPLEY  
 DERBYSHIRE DE5 3ND

TEL: 01773 303 000  
 FAX: 01773 303 300  
 EMAIL:  
 mbp.care@manthorpebp.co.uk  
 WEB  
 www.manthorpebp.co.uk

DRN M.R Date 19.06.19

DRG No

Issue

The company maintains a policy of continuous development of its product range and reserves the right to amend the specification without notice.

**MBP 8287**

**B**