



# FLUX dMEV

**ELTA** >>>  
**TRADE**

## FLUX dMEV

### Decentralised Mechanical Extract Ventilation

**Energy saving continuously running trickle & boost extract fan, with intelligent timer and humidity sensor to automatically boost airflow when needed.**

#### IMPROVES INDOOR AIR QUALITY

Better health and reduced heating costs.



Very low power consumption: the EC motor is optimised for continuous running.



Intelligent humidity control increases ventilation only in response to actual variations in humidity, preventing unnecessary heat loss, energy consumption and noisy running.



Intelligent run-on timer adapts the fan operation to the users' habits.



Totally recyclable plastic components; environmentally friendly.

01384 275771  
info@eltatrade.co.uk  
[www.eltatrade.co.uk](http://www.eltatrade.co.uk)

**WE COULDN'T FIT  
EVERYTHING ON HERE,  
SCAN THE QR CODE TO  
FIND OUT MORE**



## FEATURES & BENEFITS

- **Wall, ceiling and window mountable** (window mounting requires window kit).
- **IPX4** rated.
- **Aesthetic front cover** modern interior fascia design which is easily removed for cleaning without the need for tools.
- **Multi-speed** with adjustable minimum and intermediate speeds.
- **Low power consumption;** optimised for continuous running.
- **Constant flow option;** to speed up or slow down the unit depending on resistances caused by the length of ducting and/or external windy conditions.
- **Intelligent run-on timer** adapts the fan operation to the users' habits. The run-on period depends on the length of time the switched live connection is activated and to ensure the lowest noise levels, especially at night (if switched live connection is activated for less than 3 minutes, the unit speed does not increase).
- **Totally recyclable plastic components;** environmentally friendly.
- **5 year warranty,** for full details, visit [www.eltatrade.co.uk](http://www.eltatrade.co.uk).


» **5  
YEAR  
WARRANTY**

## PERFORMANCE DATA

FLUX dMEV 100	Min	Max
Airflow L/s (m <sup>3</sup> /h)	5 (18)	25 (90)
Power W	1.0	5.8
Sound Pressure dB(A) @ 3m	<9	38
Volts	220-240	
Hertz	50/60	
Max Ambient Temperature °C	40	
Degree of Protection	Wall: IPX4	Ceiling: IPX2

For full technical data, please refer to [www.eltatrade.co.uk](http://www.eltatrade.co.uk).

## DIMENSIONS

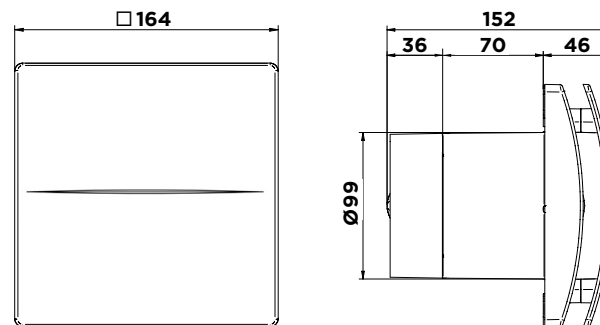

Dimensions in mm.

